

7 Inch IP Kit



VTO6210BW



VTH1560BW

Features

- 7" color TFT-LCD capacitive touch screen
- Cat 5e system, easy installation
- Support monitoring, video talk, unlock function
- Compatible to up to 8 security sensors (burglar, fire, gas leakage, etc)
- Color 1MP CMOS night vision camera
- Support IC card opening
- Intercom between all indoor monitors
- Picture capture, video record for visitors
- Support 32 channel IP camera surveillance

Specifications


| Mode | | VTO6210BW |
|-----------|-----------------------------|-------------------------------------|
| System | Main Processor | Embedded micro processor |
| | Operation System | Embedded LINUX OS |
| Video | Video Compression Standard | H.264 |
| | Input/Approaching Induction | 1MP CMOS HP camera |
| | Black Light | Support |
| Audio | Audio Input | All-direction Microphone |
| | Audio Output | Built-in speaker |
| | Bidirectional Talk | Support dual-way bidirectional talk |
| Operation | Input | Digital keyboard |

VTKB-VTO6210BW-VTH1560BW

| | | |
|---------------------------------|-----------------------------|-------------------------------------|
| Mode | Card | Built-in IC card induction reader |
| Alarm and Access Control | Vandal proof | Support |
| | Access control | Support by expansion mode |
| Network | Ethernet | 10M/100Mbps Self-adaptive |
| | Network Protocol | TCP/IP,SNMP,MDI/MDI-X Self-adaptive |
| Storage | Memory | 128MB |
| Others | Power | DC 10~15V |
| | Power Consumption | Standby $\leq 1W$, work $\leq 5W$ |
| | Working Environments | -10℃ – +55℃ |
| | Water Proof | IP65 |
| | Dimensions | 154.2mm*114.2mm*43.0mm (L*W*T) ; |
| | Weight | 0.6Kg; |

| Model | | VTH1560BW | |
|------------------------|---------------------------|--|------------|
| System | Main Processor | Built-in microcontroller | |
| | Operation System | Embedded LINUX operating system | |
| Video | compression | H.264 | |
| | Resolution | 800*480 | |
| Audio | Audio Input | All-direction microphone | |
| | Audio Output | Embedded loudspeaker | |
| | Bidirectional Talk | Support bidirectional talk | |
| Display | Size | Color 7-inch TFT LCD | |
| Operating modes | input | Mechanical keys(emergency, protection, video talk, monitoring, unlock), Touch screen technology | |
| Alarm | Alarm input | Support 8 channels input | |
| Network | Ethernet | 10 M / 100 Mbps adaptive | |
| | network protocol | TCP/IP | |
| General | Power | DC 10~15V or supply directly by Special switching power | |
| | Power Consumption | Standby $\leq 1.5W$, work $\leq 7W$ | |
| | work environment | Temperature: | -10℃ ~+60℃ |
| | | Humidity: | 10~90%RH |
| | Dimensions | 221.2mm×154.3mm×24.2mm (L*W*T) ; | |
| Weight | 0.8Kg; | | |

Application

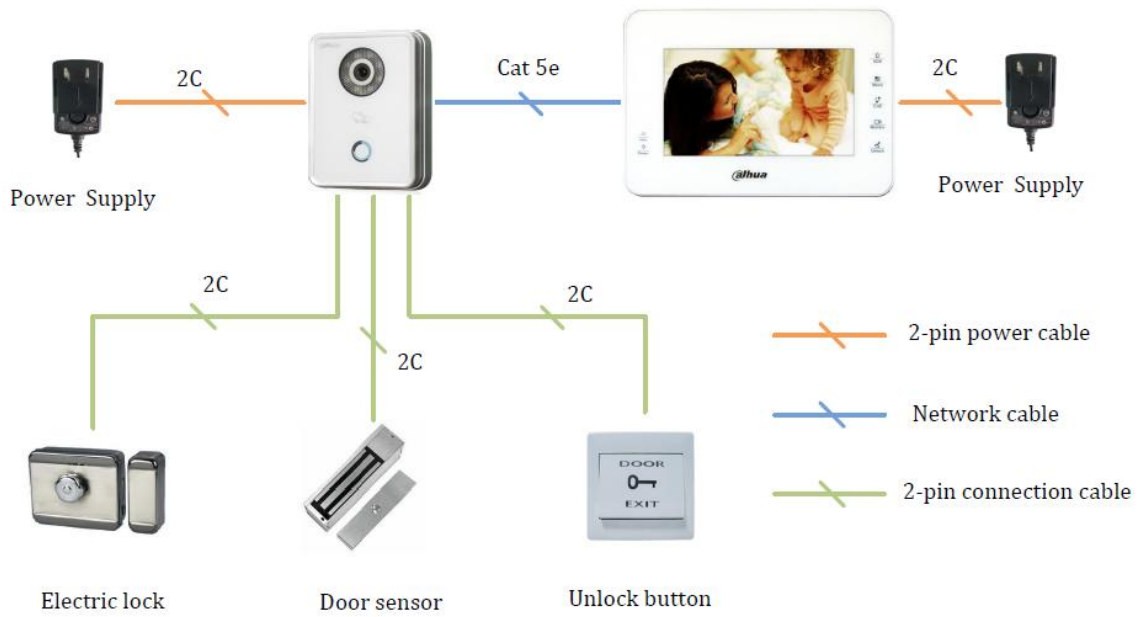

Dahua Technology Co., Ltd.
www.dahuatech.com

*Design and specifications are subject to change without notice.