



Moving The World Together

212 K

NEW LOCK
more secure

Automated system
for swing and folding Gates

With 2 Channel 5 Channel Remote Control
24vdc Heavy Duty



Simple Unlocking
System By Key

The manual release device
has been designed to make
operation really easy

ElectroMechanical
Automated System




ITALY
TECHNOLOGY



**ElectroMechanical
Automated System**

Moving The World Together

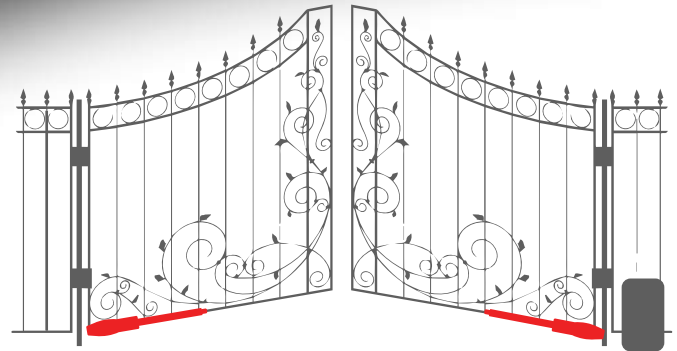

AUTOMATED SYSTEM FOR SWING AND FOLDING GATE

- Can open either left, right or both panel
- Automatic dual speed adjustment
- Smooth & silent gate operation
- 24 hour backup power
- Manual operation
- 24vdc Heavy duty

4 IN 1 UPGRADING SYSTEM (5 CHANNEL ONLY)



Panic
Alarm



Intruder
Alarm



System
Lock



Pillar Light
(Optional)

TECHNICAL SPECIFICATION

Supply Power	: AC 220V, 60Hz/50Hz
Operating Voltage	: DC 24V for Normal Speed DC12 for Cushioning Speed
Max, Length of Gate	: 3.5 Meter per Wing
Safety Clutch	: Electronic Current Sensing
Electronic Controller	: Micro- Processor Based
Position Limit Device	: Electronic Fuzzy Logic
Driving Method	: Electro - Mechanical screw drive piston type
Back-up Battery	: 12 volt 7AH Rechargeable
Max. Gate Weight	: 350kg per Wing with Force Adjustable
Motor Power Supply	: 12 - 24V
Travel Time 90 (sec)	: 10 - 15sec
Working Temperature (°C)	: 10°C to 50°C
Weight (KG)	: 2.9 KG

REMOVE CONTROL

ON / OFF
Pillar Light

Trigger / Stop
Panic Alarm

Open Left Panel or
Press and Hold Open
Right Panel

Open Close Both
Panel


Lock / Release
Push Button

5 Channel Remote

Open Left Panel or
Press and Hold Open
Right Panel

Open Close Both
Panel

2 Channel Remote

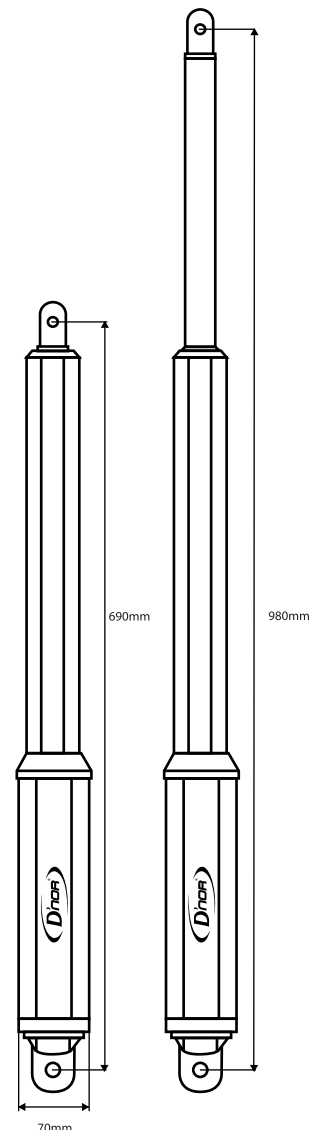

For Enquiries, Please Contact :

www.ealarm.com.my