

CM-TP-6RC, CM-TP-12RC

* Outdoor Unit (DR-DW2N)



CM-TP-6RC, CM-TP-12RC

- Feature :**
- Variable system composition (6 or 12 household)
 - Calling & paging
 - ID setting by DIP Switch
 - Effective calling to all units by Paging function
 - Door lock release(optional)
 - Easy identification of which sub-unit is in use by LED indication
 - Possible to use door phone by enabling DR-DW2N connection

Connectable Products : DR-DW2N

Wiring : 4 Wires/ 500m(0.65ø)

Power : DC 12V(RF-1A)

Dimensions (W/H/D) : 114 x 220 x 66(mm)




DR-DW2N




Door Unit only for CM-TP-6RC & CM-TP-12RC

■ DIMENSIONS

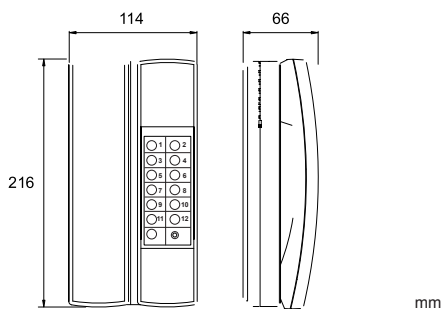

■ DIMENSIONS

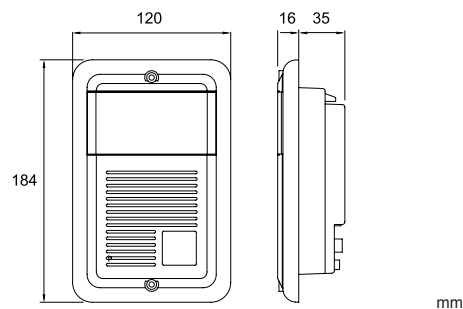

■ SYSTEM DIAGRAM

CM-TP-6RC, CM-TP-12RC

