

Installation & Quick Start Guide

ZKTeco FR1200

Version: V1.0.1

Date: December 2011

About This Manual

- This document mainly introduces the user's operation of ZKTeco FR1200. About the device installation, please refer to the Installation Guide.
- All design and specification declared are subject to change without notice in advance.

Contents

- Contents I**
- 1. Using Instruction 2**
 - 1.1 Finger Placement2
 - 1.2 Instruction for Card Using2
 - 1.3 Precautions.....2
- 2. Device Introduction 3**
- 3. Device Operations 5**
- 4 Appendix 9**
 - 4.1 List of Parameters.....9
 - Statement on Human Rights and Privacy10
 - Environment-Friendly Use Description.....11


1. Using Instruction

1.1 Finger Placement


Enroll fingerprint by pressing index finger, middle finger or ring finger (thumb and little finger are clumsy).

- **Proper press:**


Make finger center pressed on the sensor window.




- **Improper press:**




Upright



Too Lean



Slant



Too Low

Notice: Please adopt the correct way to place the finger to avoid improper operation led to the identification performance degradation.

1.2 Instruction for Card Using

Integrated with a non-contact RF card reader module, this reader supports the ID cards and Mifare cards (Optional and only used as ID cards). By offering multiple verification modes such as FP, card, FP plus card, FP or card verification, this reader can accommodate to diversified user needs.

Swipe your card across the sensor area following the light and beep prompts and remove your card after the reader has sensed it. For the card sensor area, please refer to [2 Device Introduction](#).

1.3 Precautions

Protect the reader from exposure to direct sunlight or strong beam, for the strong sunlight greatly affects the fingerprint collection and leads to fingerprint verification failure.

It is recommended to use the reader under a temperature of 0–50°C so as to achieve the optimal performance. In the event of exposure of the reader to the outdoors for long periods of time, it is recommended to adopt sunshade and heat dissipation facilities because excessively high or low temperature may slow down the reader operation and result in high false rejection rate (FRR) and false acceptance rate (FAR).

When installing the reader, please connect the power cable after all the other wiring. If the reader does not operate properly, be sure to shut down the power supply before performing necessary inspection. Be aware that any live-line working may cause damage to the reader, and that damage is beyond the scope of our normal warranty.

For matters that are not covered in this document, please refer to related materials including the Installation Guide, FP Reader Software User Manual.

2. Device Introduction

FR1200, a fingerprint reader with RS485 communication interface works with biometric access controllers and fingerprint standalone access control. It offers the function of capturing and transferring fingerprint samples to access control panel inside to match. With its IP65 rated rugged structure. This reader operation is simple and flexible. The light and beep prompts will guide you through all the operations without screen display or keyboard. Featuring a compact and simple design, this reader is a new concept of inBIO fingerprint reader.

Product Appearance:

Front view:



- **LED indicator:** The LED indicator is used to display reader operation results and exceptional statuses which are defined as follows:

Operation succeeds: The green indicator is solid on for one second, at the same time the speaker play one long beep.

Operation failed: The red indicator is solid on for one second, at the same time the speaker play two short beep.

Verification state: The green LED blinks once every two second, the beeper with no sound.


- **Card Sensor Area:** Refers to the area in the red dashed-line as shown in the figure above.
- **Fingerprint Sensor:** Used to enroll and match fingerprints.

Bottom view:



- **Reset Button:** Used to restart the reader.

Back view:

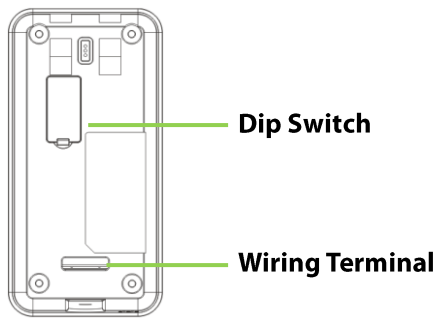

Dip Switch: 1-4 switches are used to set the RS485 communication address (device ID). Number 5 switch is idle. And the number 6 switch is used to set the terminal resistance state.

Wiring Terminal: For connection terminals.

3. Device Operations

After the reader is powered on, the reader can not identify the fingerprint or card. In other words, the reader can not receive data or send data without access control panel connection.

Only when the reader connected with the access control panel that the reader can prompt if the card or fingerprint is enrolled or not, and verify the user according to the returning result of background access control panel.

User verification operations:

1. When the reader connected with the access control panel, it is in verification state, the beep with no sound, and the green LED blink once every two second to prompt verification.
2. Start user verification. The reader supports four verifications modes: only fingerprint, only card, fingerprint plus card, fingerprint or card verification. The process include press fingerprint first or swipe card first, the operation are as the follows:

Press fingerprint first:


- (1) Press your finger on the fingerprint sensor in a proper way. The device beeps once, and then the LED off, switch to the background verification.
- (2) The access control panel determines whether the control order is timeout. If it is timeout, the device beeps 3 sounds and the red LED solid on. Otherwise, it will get the system verification modes setting.

Only fingerprint/card or fingerprint verification: Send the fingerprint template to the access control panel, and wait for the result. If it is waiting time out, beep 3 sounds and the red LED solid on. If the reader get the verification result in the setting time, 2 beep and red LED solid on for verification failed, 1 beep and green LED solid on for verification succeed.

Card plus fingerprint verification: Determine if there is the card data. If you swipe card near to the card reader, then send the fingerprint template and card data to the access control panel, and wait for the result. If it is waiting time out, beep 3 sounds and the red LED solid on. If the reader get the verification result in the setting time, 2 beep and red LED solid on for verification failed, 1 beep and green LED solid on for verification succeed.

Only card verification: No sending of the data to access control panel, the device beeps 2 sounds, and red LED solid on.

The verification operations are as follows:

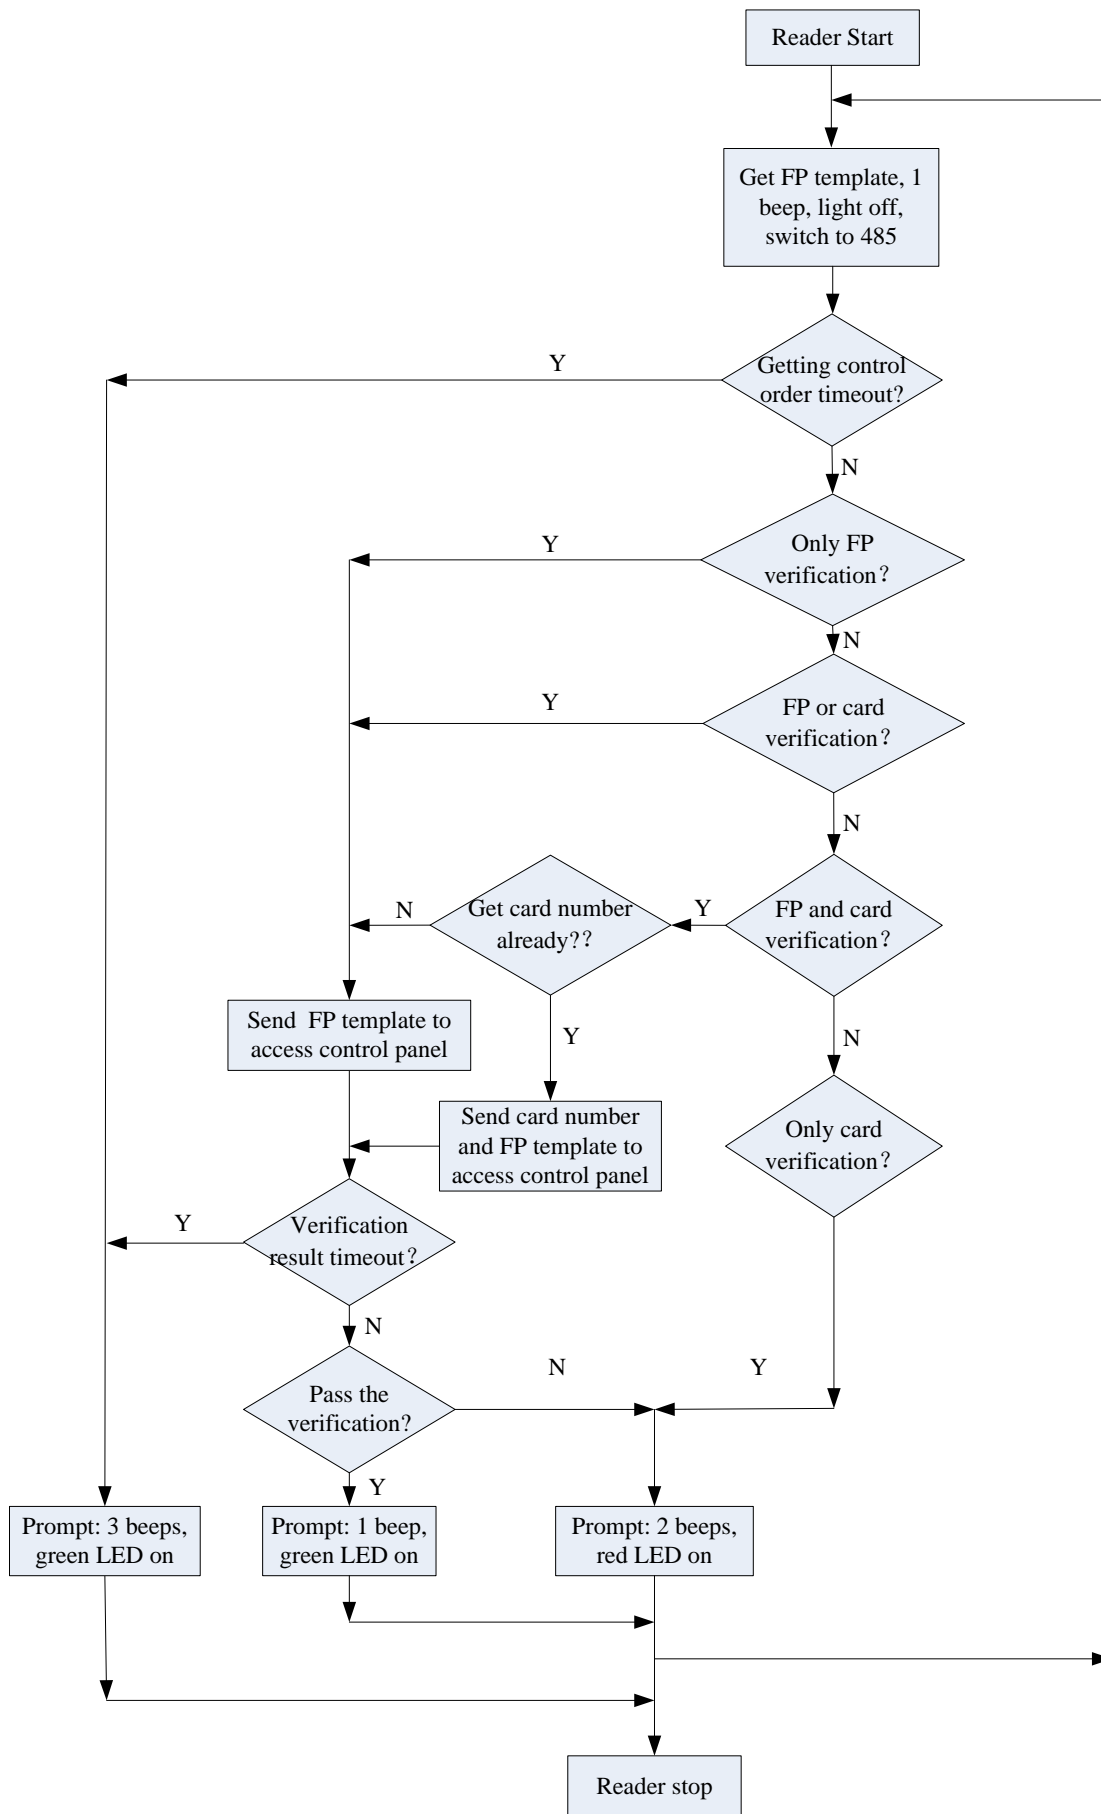

Swipe card first:

(1) Swipe your card on the card reader in a proper way. The device beeps once, and then the LED off, switch to the background verification.

(2) The access control panel determines whether the control order is timeout. If it is timeout, the device beeps 3 sounds and the red LED solid on. Otherwise, get the system verification modes setting.


Only card/card or fingerprint verification: Send the card data to the access control panel, and wait for the result. If it is waiting time out, beep 3 sounds and the red LED solid on. If the reader get the verification result in the setting time, 2 beep and red LED solid on for verification failed, 1 beep and green LED solid on for verification succeed.

Card plus fingerprint verification: Determine if there is the fingerprint data. If it is waiting time out, beep 3 sounds and the red LED solid on. Otherwise, it will follow the card plus fingerprint verification as press fingerprint first.

Only fingerprint verification: No sending of the data to access control panel, the device beeps 2 sounds, and red LED solid on.

Note: For the verification mode setting, please refer to the FP reader software user manual or relevant software user manual.

The verification operations are as follows:

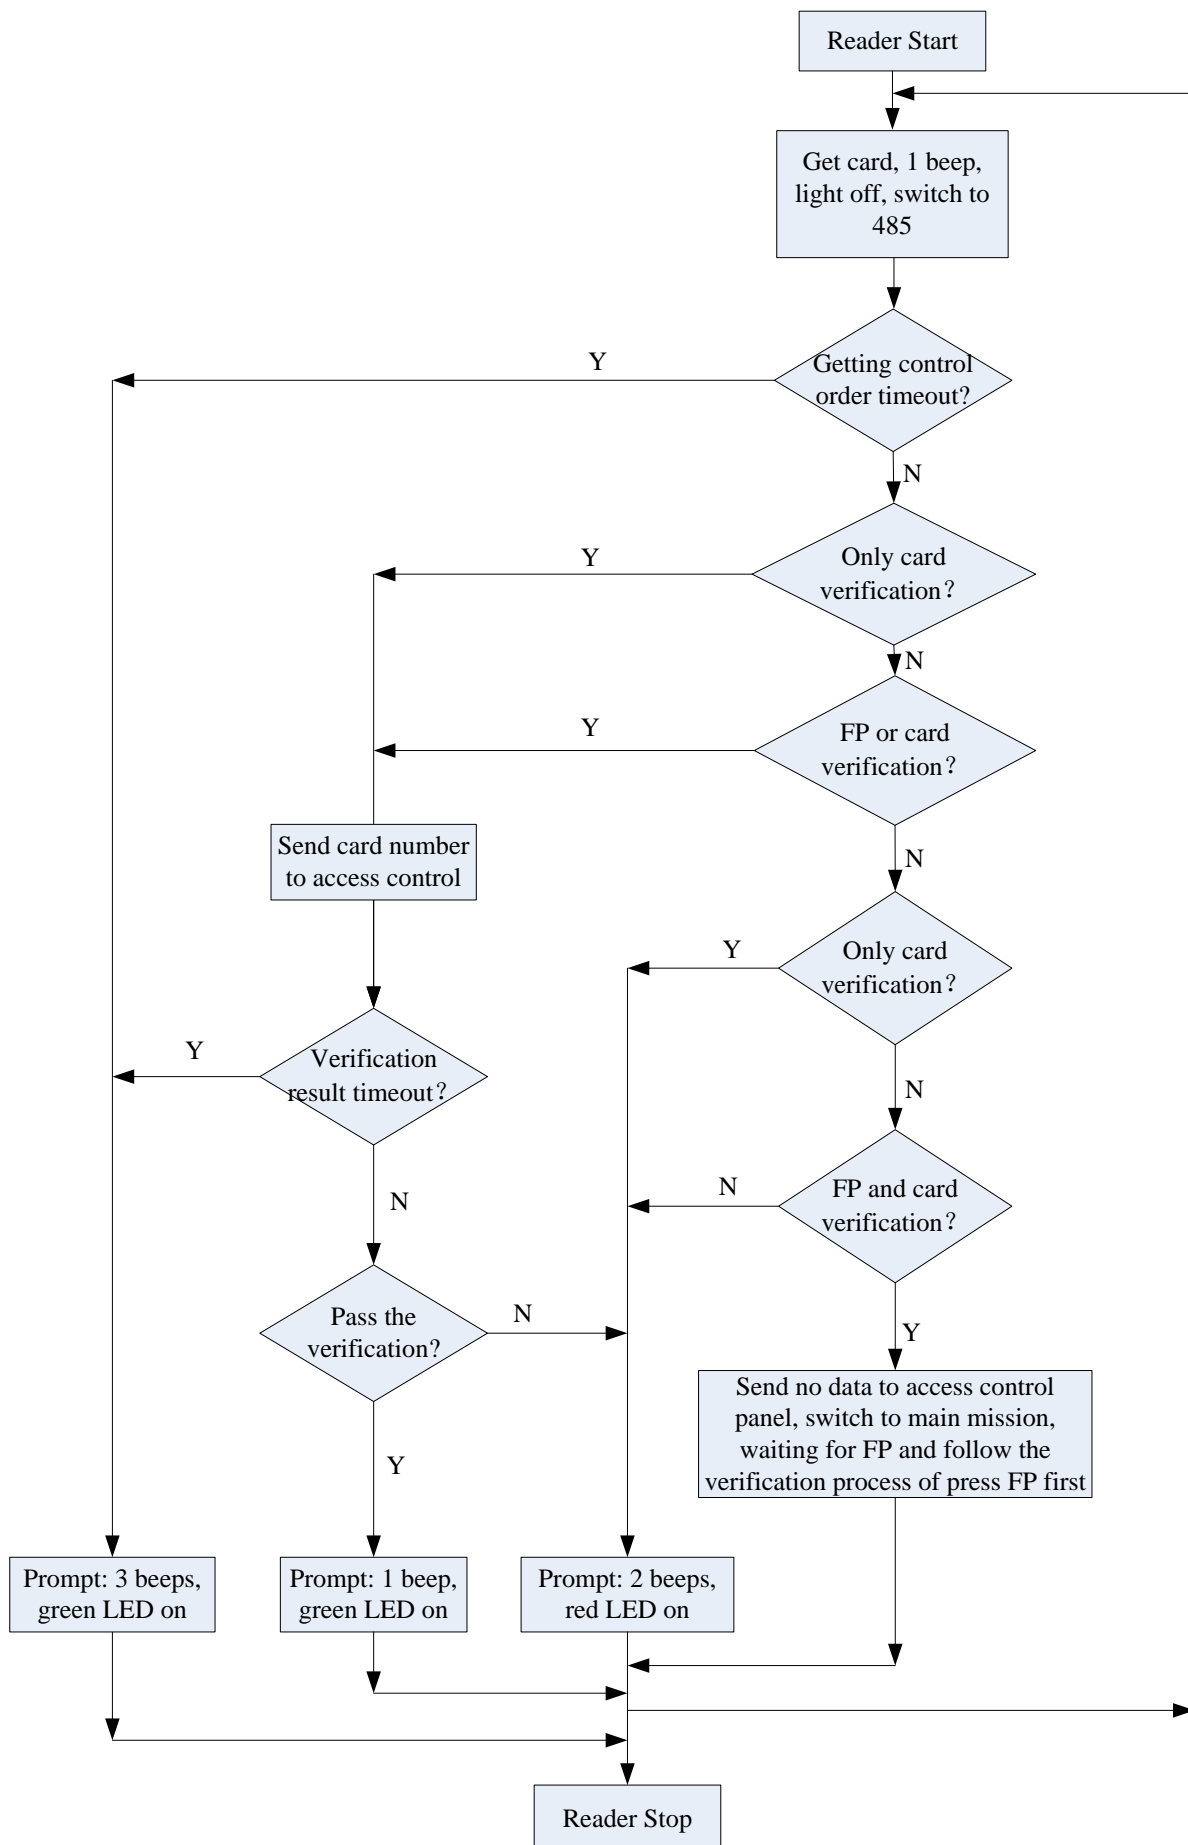

4 Appendix

4.1 List of Parameters

The following table lists the basic functional parameters of the reader.

Item	Note
Power Supply	DC12V/3A
External Function	EXT 485 for access control panel connection
Verification mode.	ID (Mifare) card, fingerprint
Communications	RS485
Speaker	Beep prompt
LED	Bi-color indication (red/green)